


New Release

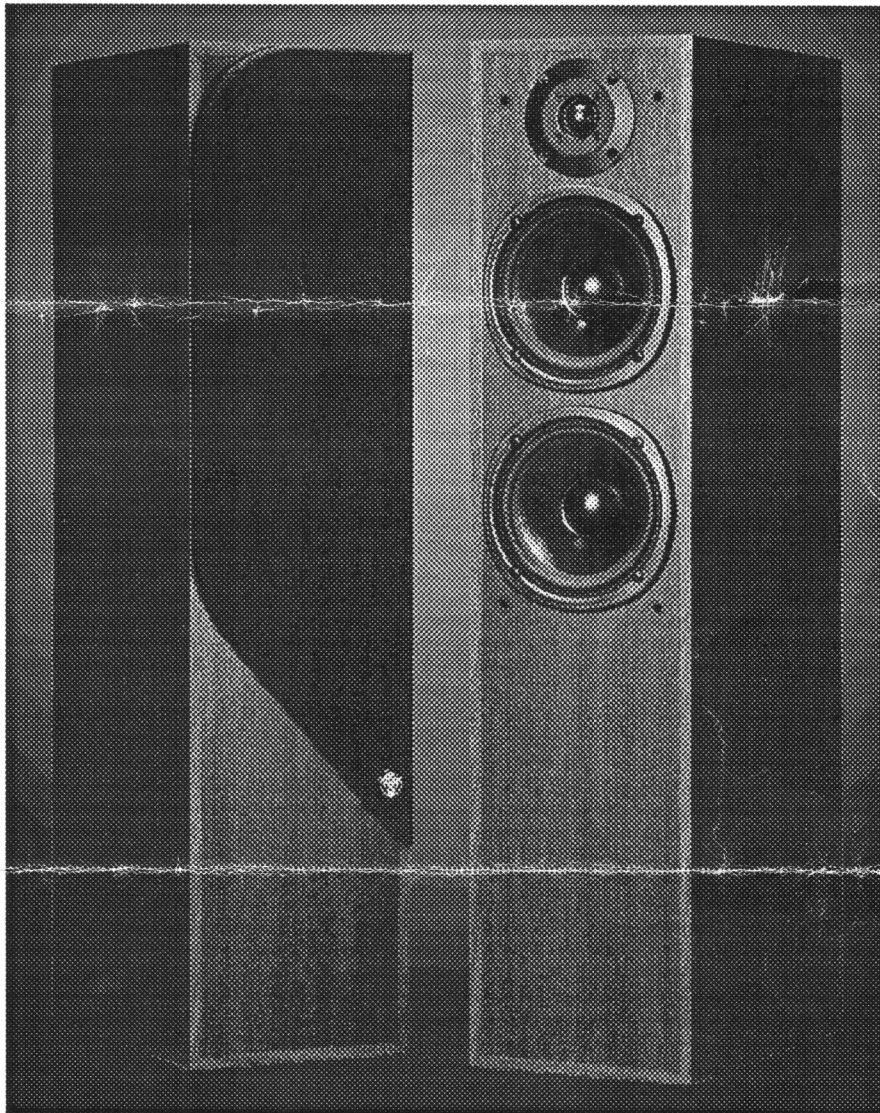

Orpheus Nexus 2 Technical specifications

The Nexus 2 is part of a new range from Orpheus Loudspeakers. It is a truly dynamic speaker that fulfills the rigorous demands of Home theatre and yet retains the utmost fidelity for music lovers.

Design: 3 Driver, 2 way bass reflex.

Bass

Response: - 3dB at 45Hz.

Frequency

Response: 45Hz - 20kHz +/-2.5dB.

Sensitivity: 93dB. 2.83v at 1 meter

Amplifier

Requirement: 40 - 150 watts.

Power

Handling: 120 watts Music Programme.

Nominal

Impedance: 4 ohms.

Cabinet

construction: 16mm MDF board, strategically braced utilising the Torsionally Resistant Interlock System.(TRIS)TM

Drive units:

Tweeters - 25mm fabric treated dome, ferrofluid cooled.

Bass/Mid - 155mm doped paper cone, rubber roll surround
25mm high temperature voice coil with aluminium former.

Crossover: 5 element, air cored inductors, Solen metallised polypropylene capacitors.

Connections: Gold plated binding posts.

Ideal listening

position: 0.5m - 1.0m from wall.

Dimension

(h x w x d): 870mm x 200mm x 325mm. (without spikes)

Weight: 18kg/speaker.

Finish: Simulated timber finish in Black Ash or Mahogany

Professional Users of Orpheus Loudspeakers include A.B.C.Radio(Classical FM,JJJ,Radio National),EMI Australia Recording Studio 301,Channel 7,Channel 10 and many other recording professionals.

It is the policy of Orpheus loudspeakers to continually improve the sound quality of all orpheus models and reserve the right to change their specification without notice.

BRAD-

* SWAP WIRES